

CABLE DATASHEET

**Nexans Power Accessories
Germany GmbH**

Ferdinand-Porsche-Straße 12
D-95028 Hof/Saale

Tel.: +49(0)9281 / 8306 - 0

Fax: +49(0)9281 / 8306 - 480

E-Mail: Kundenzentrum.Hof@nexans.com

Company:

Address:

Tel.:

Fax:

E-Mail:

Cable Data

Cable type:

Single core

Three core

Other

Single core flexible rubber insulated cable

Three core flexible rubber insulated cable

Standard

Conductor material:

Aluminium

Copper

cross section

195

mm²

Conductor shape:

stranded conductor

solid conductor

flexible sector conductor

solid sector conductor

flexible conductor

RM(V)

RE

SM

SE

RF

Other

System Voltage:

3.6/6 (7.2) kV

6/10 (12) kV

6.35/11 (12) kV

8.7/15 (17.5) kV

12/20 (24) kV

12.7/22 (24) kV



18/30 (36) kV

19/33 (36) kV

20.8/36 (42) kV

Other: kV

Type of cable:

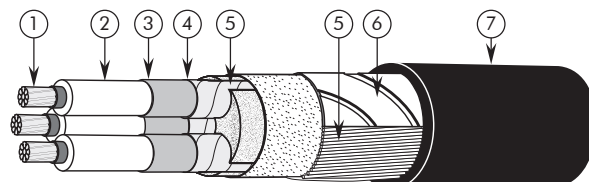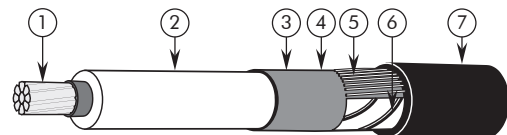

1. Ø Conductor **195** mm

2. Ø Core insulation mm

3. Ø Semi-conductive screen mm

4. fixed bonded semiconductive layer graphitated semiconductive layer extruded easy strip conductive screen

5. Metal screen Al Cu

6. Armour type Yes No

7. Outer sheath diameter: **3.02 (1,19 inch)** mm

XLPE

PVC

EPR

Wire screen Tape screen Cross section

Armour Max. Current A